



MAR O

Katalog razvodnih ormara
Distribution boxes catalogue

Sadržaj

Content

METALIS

- | | | |
|------|---|----|
| 1.1. | Podžbukni razvodni ormari s metalnim vratima
<i>In wall distribution boxes with metal doors</i> | 5 |
| 1.2. | Podžbukni razvodni ormari za multimediju
s metalnim perforiranim vratima
<i>In wall distribution boxes for multimedia
with metal perforated doors</i> | 9 |
| 1.3. | Podžbukni razvodni ormari za multimediju
s Patch Panelom i metalnim perforiranim vratima
<i>In wall distribution boxes for multimedia
with Patch Panel and metal perforated doors</i> | 13 |
| 1.4. | Podžbukni razvodni ormari za slabu struju
s metalnim (perforiranim) vratima
<i>In-wall distribution boxes for low voltage power
with metal (perforated) doors</i> | 17 |
| 1.5. | Pribor
<i>Accessories</i> | 21 |

FINE

- | | | |
|------|---|----|
| 2.1. | Podžbukni razvodni ormari s bijelim
i prozirnim plastičnim vratima
<i>In wall distribution boxes with white
and transparent plastic doors</i> | 25 |
| 2.2. | Podžbukni razvodni ormari
s dekorativnim plastičnim vratima
<i>In wall distribution boxes with decorative plastic doors</i> | 29 |

TOWER

- | | | |
|------|--|----|
| 3.1. | Nadžbukni razvodni ormari s plastičnim vratima
<i>On wall plastic distribution boxes with plastic doors</i> | 33 |
|------|--|----|

DOMINO

- | | | |
|------|--|----|
| 4.1. | Nažbukni vodotjesni ormari
<i>On wall waterproof distribution boxes</i> | 37 |
| 4.2. | Pribor
<i>Accessories</i> | 41 |

1 1

mandeks



MARO | METALIS

Podžbukni razvodni ormari s metalnim vratima

In wall distribution boxes with metal doors

1.1. Podžbukni razvodni ormari s metalnim vratima

In wall distribution boxes with metal doors

- metalna vrata i okvir, bijele boje RAL 9016
- sukladno normi EN 60670-1 i IEC 60670-24
- područje ugradnje: podžbukna ugradnja u zid od opeke i šuplje stjenke
- nazivna struja: za uređaje do 63A
- 400V~, razred II
- IP30 bez vrata
- IP40 sa vratima

PRILOŽENA OPREMA

- nosači osigurača
- izolirani konektori za vod za uzemljenje/neutralni vod, zadovoljavaju test užarenom niti na 960 °C
- pribor za instalaciju u zid od opeke/šuplje stjenke
- slijepi poklopac

MOGUĆNOSTI

- ugradnja libele, ugradnja bravice sa ključem, ugradnja Modul opreme, korištenjem adaptera RB10 i RB11, izmjena smjera otvaranja vrata na lijevo ili desno, bez demontaže okvira

- metal door and frame, white color RAL 9016
- in accordance with EN 60670-1 i IEC 60670-24
- installation: In wall - brick and hollow walls
- rated current: up to 63A
- 400V~, class II
- IP30 without door
- IP40 with door

ACCESSORIES

- DIN rail for circuit breakers
- insulated connectors for earthing/neutral, suitable to glow wire test of 960 °C
- brick/hollow wall mounting distribution box carrier set
- blank

POSSIBILITIES

- installation of level, installation of lock with key, installation of Modul program by using adapters RB10 and RB11, change of direction of opening door to left or right side, without dismantling the frame



RB20
4341114
RB20VO

RAZVODNI ORMAR METALIS 12+2
DIN JEDNOREDNI P/Ž

RAZVODNI ORMAR METALIS
12+2 DIN JEDNOREDNI ZA ŠUPLJE
STJENKE P/Ž

Izolirani konektori N + PE:
2x(2x25mm² + 8x16mm²)

DISTRIBUTION BOX METALIS
12+2 DIN ONE ROW IN-WALL

DISTRIBUTION BOX METALIS
12+2 DIN ONE ROW FOR HOLLOW
WALLS IN-WALL

Terminal strip N + PE:
2x(2x25mm² + 8x16mm²)



RB21
4341115
RB21VO

RAZVODNI ORMAR METALIS 24+4
DIN DVOREDNI P/Ž

RAZVODNI ORMAR METALIS 24+4
DIN DVOREDNI ZA ŠUPLJE STJENKE
P/Ž

Izolirani konektori N + PE:
2x(2x25mm² + 14x16mm²)

DISTRIBUTION BOX METALIS
24+4 DIN TWO ROWS IN-WALL

DISTRIBUTION BOX METALIS 24+4
DIN TWO ROWS FOR HOLLOW
WALLS IN-WALL

Terminal strip N + PE:
2x(2x25mm² + 14x16mm²)



RB22
4341116
RB22VO

RAZVODNI ORMAR METALIS 36+6
DIN TROREDNI P/Ž

RAZVODNI ORMAR METALIS 36+6
DIN TROREDNI ZA ŠUPLJE STJENKE
P/Ž

Izolirani konektori N + PE:
4x(2x25mm² + 14x16mm²)

DISTRIBUTION BOX METALIS
36+6 DIN THREE ROWS IN-WALL

DISTRIBUTION BOX METALIS
36+6 DIN THREE ROWS FOR
HOLLOW WALLS IN-WALL

Terminal strip N + PE:
4x(2x25mm² + 14x16mm²)



RB23
4341117

RAZVODNI ORMAR METALIS 48+8
DIN ČETVEROREDNI P/Ž

*DISTRIBUTION BOX METALIS
48+8 DIN FOUR ROWS IN-WALL*

RB23V0

RAZVODNI ORMAR METALIS 48+8
DIN ČETVEROREDNI ZA ŠUPLJE
STJENKE P/Ž

*DISTRIBUTION BOX METALIS 48+8
DIN FOUR ROWS FOR HOLLOW
WALLS IN-WALL*

Izolirani konektori N + PE:
4x(2x25mm² + 14x16mm²)

*Terminal strip N + PE:
4x(2x25mm² + 14x16mm²)*



RB24

RAZVODNI ORMAR METALIS
60+10 DIN PETEROREDNI P/Ž

*DISTRIBUTION BOX METALIS
60+10 DIN FIVE ROWS IN-WALL*

RB24V0


RAZVODNI ORMAR METALIS
60+10 DIN PETEROREDNI ZA
ŠUPLJE STJENKE P/Ž

*DISTRIBUTION BOX METALIS
60+10 DIN FIVE ROWS FOR
HOLLOW WALL IN-WALL*

Izolirani konektori N + PE:
4x(2x25mm² + 14x16mm²)

*Terminal strip N + PE:
4x(2x25mm² + 14x16mm²)*

1.1.

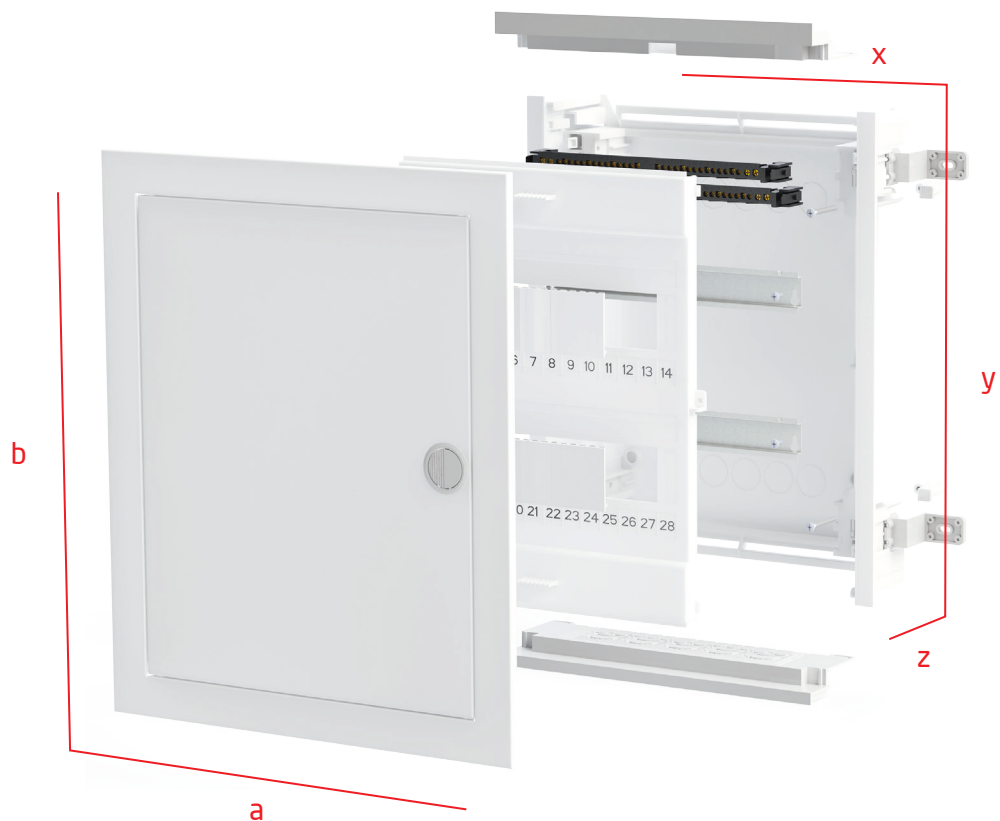

	RB20 RB20V0	RB21 RB21V0	RB22 RB22V0	RB23 RB23V0	RB24 RB24V0
vanjske dimenzije proizvoda (abc*) / external product dimensions (abc*)	368 x 343 x 93	368 x 443 x 93	368 x 568 x 93	368 x 753 x 93	368 x 878 x 93
dimenzije otvora za ugradnju (xyz) / installation hole dimensions (xyz)	314 x 314 x 86,5	314 x 414 x 86,5	314 x 539 x 86,5	314 x 724 x 86,5	314 x 849 x 86,5

* c - dubina / depth

1.2.

mandeks



MARO | METALIS

Podžbukni razvodni ormari za multimediju
s metalnim perforiranim vratima

*In wall distribution boxes for multimedia
with metal perforated doors*

1.2. Podžbukni razvodni ormari za multimediju s metalnim perforiranim vratima

In wall distribution boxes for multimedia with metal perforated doors

- metalna perforirana vrata i okvir, bijele boje RAL 9016
- sukladno normi EN 60670-1 i IEC 60670-24
- područje ugradnje: podžbukna ugradnja u zid od opeke i šuplje stjenke
- nazivna struja: za uređaje do 63A
- 400V~, razred II
- IP30 bez vrata
- IP40 sa vratima

PRILOŽENA OPREMA

- nosači osigurača
- mrežasta montažna ploča Metalis ormara za multimediju
- nosač modema
- AC41PW - KUČIŠTE NO CUBO IP20 4M PW
- izolirani konektori za vod za uzemljenje/neutralni vod
- pribor za instalaciju u zid od opeke/šuplje stjenke

MOGUĆNOSTI

- ugradnja libele, ugradnja bravice sa ključem, ugradnja dodatnog nosača modema, ugradnja Modul programa, u kućište AC41PW ili korištenjem adaptera RB10 i RB11, izmjena smjera otvaranja vrata na lijevo ili desno, bez demontaže okvira

- metal perforated door and frame, white color RAL 9016
- in accordance with EN 60670-1 and IEC 60670-24
- installation: In wall - brick walls and hollow walls
- rated current: up to 63A
- 400V~, class II
- IP30 without door
- IP40 with door

ACCESSORIES

- DIN rail for circuit breakers
- mounting plate for distribution box for multimedia
- modem carrier
- AC41PW - BOX NO CUBO IP20 4M
- insulated connectors for earthing/neutral
- brick/hollow wall mounting distribution box carrier set

POSSIBILITIES

- installation of level, installation of lock with key, installation of another modem carrier, installation of Modul program in AC41PW - BOX NO CUBO or by using adapters RB10 and RB11, change of direction of opening door to left or right side, without dismantling the frame



RB93

MULTIMEDIJALNI RAZVODNI ORMAR METALIS "2" P/Ž

DISTRIBUTION BOX METALIS FOR MULTIMEDIA "2" IN-WALL

RB93V0

MULTIMEDIJALNI RAZVODNI ORMAR METALIS "2" ZA ŠUPLJE STJENKE P/Ž

DISTRIBUTION BOX METALIS FOR MULTIMEDIA "2" FOR HOLLOW WALLS IN-WALL

Mrežasta montažna ploča Metalis ormara za multimediju 2x

Mounting plate for distribution box for multimedia 2X



RB94

MULTIMEDIJALNI RAZVODNI ORMAR METALIS "3" P/Ž

DISTRIBUTION BOX METALIS FOR MULTIMEDIA "3" IN-WALL

RB94V0

MULTIMEDIJALNI RAZVODNI ORMAR METALIS "3" ZA ŠUPLJE STJENKE P/Ž

DISTRIBUTION BOX METALIS FOR MULTIMEDIA "3" FOR HOLLOW WALLS IN-WALL

Mrežasta montažna ploča Metalis ormara za multimediju 3x

Mounting plate for distribution box for multimedia 3X

**RB95**

MULTIMEDIJALNI RAZVODNI
ORMAR METALIS "4" P/Ž

*DISTRIBUTION BOX METALIS FOR
MULTIMEDIA "4" IN-WALL*


RB95V0

MULTIMEDIJALNI RAZVODNI
ORMAR METALIS "4" ZA ŠUPLJE
STJENKE P/Ž

*DISTRIBUTION BOX METALIS FOR
MULTIMEDIA "4" FOR HOLLOW
WALLS IN-WALL*

Mrežasta montažna ploča Metalis
ormara za multimediju 4x

*Mounting plate for distribution
box for multimedia 4X*

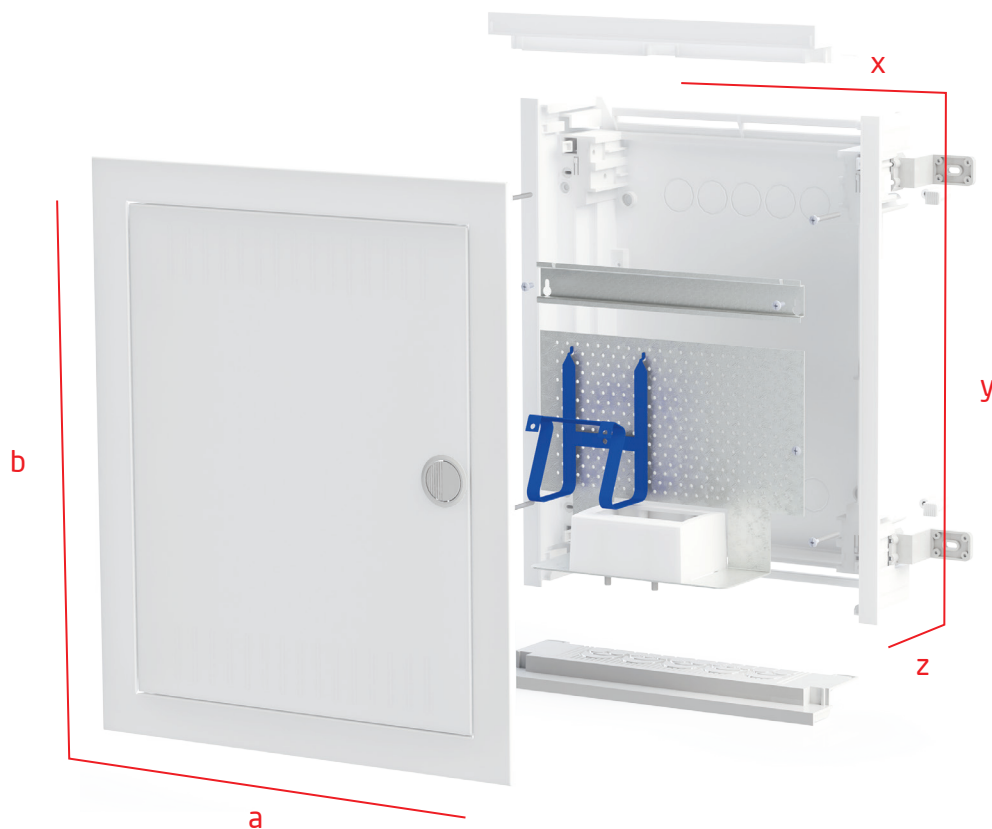


	RB93 RB93V0	RB94 RB94V0	RB95 RB95V0
vanjske dimenzije proizvoda (abc*) / external product dimensions (abc*)	368 x 443 x 93	368 x 568 x 93	368 x 753 x 93
dimenzije otvora za ugradnju (xyz) / installation hole dimensions (xyz)	314 x 414 x 86,5	314 x 539 x 86,5	314 x 724 x 86,5

* c - dubina / depth



1.3.

mandeks

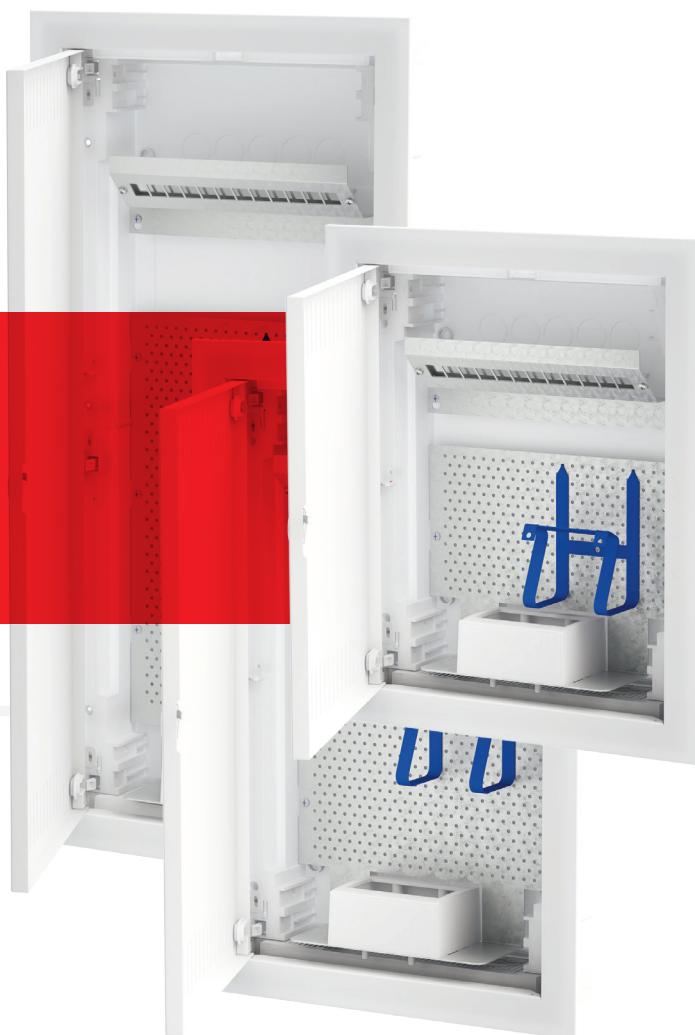

MARO | METALIS

Podžbukni razvodni ormari za multimediju
s Patch Panelom i metalnim perforiranim vratima

*In wall distribution boxes for multimedia
with Patch Panel and metal perforated doors*

1.3. Podžbukni razvodni ormari za multimediju s Patch Panelom i metalnim perforiranim vratima

In wall distribution boxes for multimedia with Patch Panel and metal perforated doors

- metalna perforirana vrata i okvir, bijele boje RAL 9016
- sukladno normi EN 60670-1 i IEC 60670-24
- područje ugradnje: podžbukna ugradnja u zid od opeke i šuplje stjenke
- nazivna struja: za uređaje do 63A
- 400V~, razred II
- IP30 bez vrata
- IP40 sa vratima

PRILOŽENA OPREMA

- Patch Panel 12 M, keystone standard pričvršćivanja
- mrežasta montažna ploča Metalis ormara za multimediju
- nosač modema
- AC41PW - KUČIŠTE NO CUBO IP20 4M PW
- izolirani konektori za vod za uzemljenje/neutralni vod
- pribor za instalaciju u zid od opeke/šuplje stjenke

MOGUĆNOSTI

- ugradnja libele, ugradnja bravice sa ključem, ugradnja dodatnog nosača modema, ugradnja Modul programa, u kućište AC41PW ili korištenjem adaptera RB10 i RB11, ugradnja modularnih elemenata za Multimediju korištenjem Patch Panela, izmjena smjera otvaranja vrata na lijevo ili desno, bez demontaže okvira

- metal perforated door and frame, white color RAL 9016
- In accordance with EN 60670-1 and IEC 60670-24
- installation: In wall - brick walls and hollow walls
- rated current: up to 63A
- 400V~, class II
- IP30 without door
- IP40 with door

ACCESSORIES

- Patch Panel 12 M, keystone fixing standard
- mounting plate for distribution box for multimedia
- modem carrier
- AC41PW - BOX NO CUBO IP20 4M
- insulated connectors for earthing/neutral
- brick/hollow wall mounting distribution box carrier set

POSSIBILITIES

- installation of level, installation of lock with key, installation of another modem carrier, installation of Modul program in AC41PW - BOX NO CUBO or by using adapters RB10 and RB11, installation of modular elements for multimedia by using Patch Panel change of direction of opening door to left or right side, without dismantling the frame



RB93PP

MULTIMEDIJALNI RAZVODNI ORMAR METALIS "2" S PATCH PANELOM 12M P/Ž

DISTRIBUTION BOX METALIS FOR MULTIMEDIA "2" WITH PATCH PANEL 12M IN-WALL

RB93PPV0

MULTIMEDIJALNI RAZVODNI ORMAR METALIS "2" S PATCH PANELOM 12M ZA ŠUPLJE STJENKE P/Ž

DISTRIBUTION BOX METALIS FOR MULTIMEDIA "2" WITH PATCH PANEL 12M FOR HOLLOW WALLS IN-WALL

Mrežasta montažna ploča Metalis ormara za multimediju 2x

Mounting plate for distribution box for multimedia 2X



RB94PP

MULTIMEDIJALNI RAZVODNI ORMAR METALIS "3" S PATCH PANELOM 12M P/Ž

DISTRIBUTION BOX METALIS FOR MULTIMEDIA "3" WITH PATCH PANEL 12M IN-WALL

RB94PPV0

MULTIMEDIJALNI RAZVODNI ORMAR METALIS "3" S PATCH PANELOM 12M ZA ŠUPLJE STJENKE P/Ž

DISTRIBUTION BOX METALIS FOR MULTIMEDIA "3" WITH PATCH PANEL 12M FOR HOLLOW WALLS IN-WALL

Mrežasta montažna ploča Metalis ormara za multimediju 3x

Mounting plate for distribution box for multimedia 3X

**RB95PP**

MULTIMEDIJALNI RAZVODNI
ORMAR METALIS "4"
S PATCH PANELOM 12M P/Ž

*DISTRIBUTION BOX METALIS
FOR MULTIMEDIA "4"
WITH PATCH PANEL 12M IN-WALL*


RB95PPV0

MULTIMEDIJALNI RAZVODNI
ORMAR METALIS "4"
S PATCH PANELOM 12M
ZA ŠUPLJE STJENKE P/Ž

*DISTRIBUTION BOX METALIS
FOR MULTIMEDIA "4"
WITH PATCH PANEL 12M
FOR HOLLOW WALLS IN-WALL*

Mrežasta montažna ploča Metalis
ormara za multimediju 4x

*Mounting plate for distribution
box for multimedia 4X*

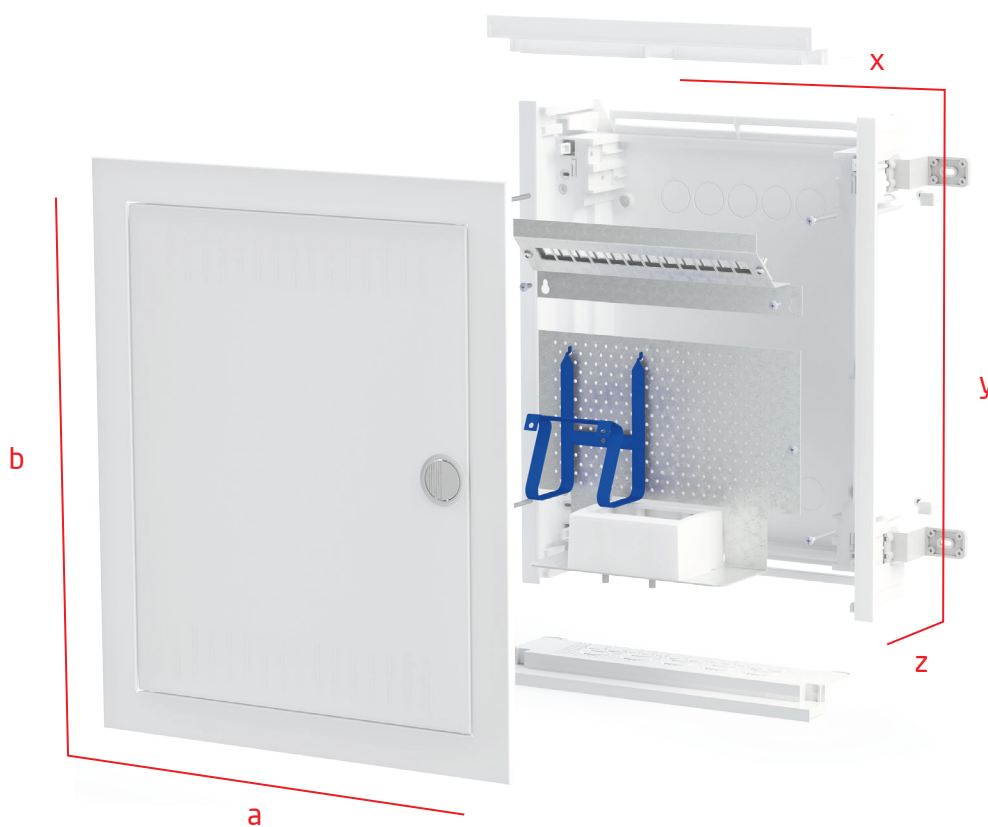

	RB93PP RB93PPV0	RB94PP RB94PPV0	RB95PP RB95PPV0
vanjske dimenzije proizvoda (abc*) / external product dimensions (abc*)	368 x 443 x 93	368 x 568 x 93	368 x 753 x 93
dimenzije otvora za ugradnju (xyz) / installation hole dimensions (xyz)	314 x 414 x 86,5	314 x 539 x 86,5	314 x 724 x 86,5

* c - dubina / depth

1.4.

mandeks



MARO | METALIS

Podžbukni razvodni ormari za slabu struju
s metalnim (perforiranim) vratima

*In-wall distribution boxes for low voltage power
with metal (perforated) doors*

1.4. Podžbukni razvodni ormari za slabu struju s metalnim (perforiranim) vratima

In-wall distribution boxes for low voltage power with metal (perforated) doors

- metalna ili perforirana metalna vrata i okvir, bijele boje RAL 9016
- sukladno normi EN 60670-1 i IEC 60670-24
- područje ugradnje: podžbukna ugradnja u zid od opeke i šuplje stjenke
- nazivna struja: za uređaje do 63A
- 400V~, razred II
- IP30 bez vrata
- IP40 sa vratima

PRILOŽENA OPREMA

- pribor za instalaciju u zid od opeke/šuplje stjenke

MOGUĆNOSTI

- ugradnja nosača osigurača, ugradnja Patch Panela, keystone standard pričvršćivanja, ugradnja mrežastih montažnih ploča ormara za multimediju, ugradnja nosača modema, ugradnja izoliranog konektora za vod za uzemljenje i neutralni vod, ugradnja bravice sa ključem, ugradnja libele, ugradnja Modul programa, korištenjem adaptera RB10 i RB11, ugradnja modularnih elemenata za Multimediju korištenjem Patch Panela, izmjena smjera otvaranja vrata na lijevo ili desno, bez demontaže okvira

- metal or perforated metal door and frame, white color RAL 9016
- in accordance with EN 60670-1 and IEC 60670-24
- installation: In wall - brick walls and hollow walls
- rated current: up to 63A
- 400V~, class II
- IP30 without door
- P40 with door

ACCESSORIES

- brick/hollow wall mounting distribution box carrier set

POSSIBILITIES

- installation of DIN rail for circuit breakers, installation of Patch Panel, keystone fixing standard, installation of mounting plate for distribution box for multimedia, installation of modem carrier, installation of insulated connectors for earthing, installation of lock with key, installation of lever, installation of Modul program by using adapters RB10 and RB11, installation of modular elements by using Patch Panel, change of direction of opening door to left or right side, without dismantling the frame



RE20
RB29

RE20V0

RAZVODNI ORMAR METALIS ZA SLABU STRUJU "1" P/Ž

ZA CIGLENI ZID, SA STANDARDNIM METALNIM VRATIMA

ZA ŠUPLJE STJENKE, SA STANDARDNIM METALNIM VRATIMA

LOW VOLTAGE POWER DISTRIBUTION BOX METALIS "1" IN-WALL

FOR BRICK WALLS, WITH STANDARD METAL DOOR

FOR HOLLOW WALLS, WITH STANDARD METAL DOOR



RE21
RB98

RE21PV

RE21V0

RE21PVV0

RAZVODNI ORMAR METALIS ZA SLABU STRUJU "2" P/Ž

ZA CIGLENI ZID, SA STANDARDNIM METALNIM VRATIMA

ZA CIGLENI ZID, S PERFORIRANIM METALNIM VRATIMA

ZA ŠUPLJE STJENKE, SA STANDARDNIM METALNIM VRATIMA

ZA ŠUPLJE STJENKE, S PERFORIRANIM METALNIM VRATIMA

LOW VOLTAGE POWER DISTRIBUTION BOX METALIS "2" IN-WALL

FOR BRICK WALLS, WITH STANDARD METAL DOOR

FOR BRICK WALLS, WITH PERFORATED METAL DOOR

FOR HOLLOW WALLS, WITH STANDARD METAL DOOR

FOR HOLLOW WALLS, WITH PERFORATED METAL DOOR



RE22
RB97

RAZVODNI ORMAR METALIS ZA
SLABU STRUJU "3" P/Ž

LOW VOLTAGE POWER DISTRIBUTION
BOX METALIS "3" IN-WALL

RE22PV

ZA CIGLENI ZID, SA STANDARDNIM
METALNIM VRATIMA

FOR BRICK WALLS, WITH STANDARD
METAL DOOR

RE22V0

ZA CIGLENI ZID, S PERFORIRANIM
METALNIM VRATIMA

FOR BRICK WALLS, WITH
PERFORATED METAL DOOR

RE22PVV0

ZA ŠUPLJE STJENKE, SA
STANDARDNIM METALNIM VRATIMA

FOR HOLLOW WALLS, WITH
STANDARD METAL DOOR

ZA ŠUPLJE STJENKE, S
PERFORIRANIM METALNIM VRATIMA

FOR HOLLOW WALLS, WITH
PERFORATED METAL DOOR



RE23

RAZVODNI ORMAR METALIS ZA
SLABU STRUJU "4" P/Ž

LOW VOLTAGE POWER DISTRIBUTION
BOX METALIS "4" IN-WALL

RE23PV

ZA CIGLENI ZID, SA STANDARDNIM
METALNIM VRATIMA

FOR BRICK WALLS, WITH STANDARD
METAL DOOR

RE23V0

ZA CIGLENI ZID, S PERFORIRANIM
METALNIM VRATIMA

FOR BRICK WALLS, WITH
PERFORATED METAL DOOR

RE23PVV0

ZA ŠUPLJE STJENKE, SA
STANDARDNIM METALNIM VRATIMA

FOR HOLLOW WALLS, WITH
STANDARD METAL DOOR

ZA ŠUPLJE STJENKE, S
PERFORIRANIM METALNIM VRATIMA

FOR HOLLOW WALLS, WITH
PERFORATED METAL DOOR



RE24

RAZVODNI ORMAR METALIS ZA
SLABU STRUJU "5" P/Ž

LOW VOLTAGE POWER DISTRIBUTION
BOX METALIS "5" IN-WALL

RE24PV

ZA CIGLENI ZID, SA STANDARDNIM
METALNIM VRATIMA

FOR BRICK WALLS, WITH STANDARD
METAL DOOR

RE24V0

ZA CIGLENI ZID, S PERFORIRANIM
METALNIM VRATIMA

FOR BRICK WALLS, WITH
PERFORATED METAL DOOR

RE24PVV0


ZA ŠUPLJE STJENKE, SA
STANDARDNIM METALNIM VRATIMA

FOR HOLLOW WALLS, WITH
STANDARD METAL DOOR

ZA ŠUPLJE STJENKE, S
PERFORIRANIM METALNIM VRATIMA

FOR HOLLOW WALLS, WITH
PERFORATED METAL DOOR


1.4.

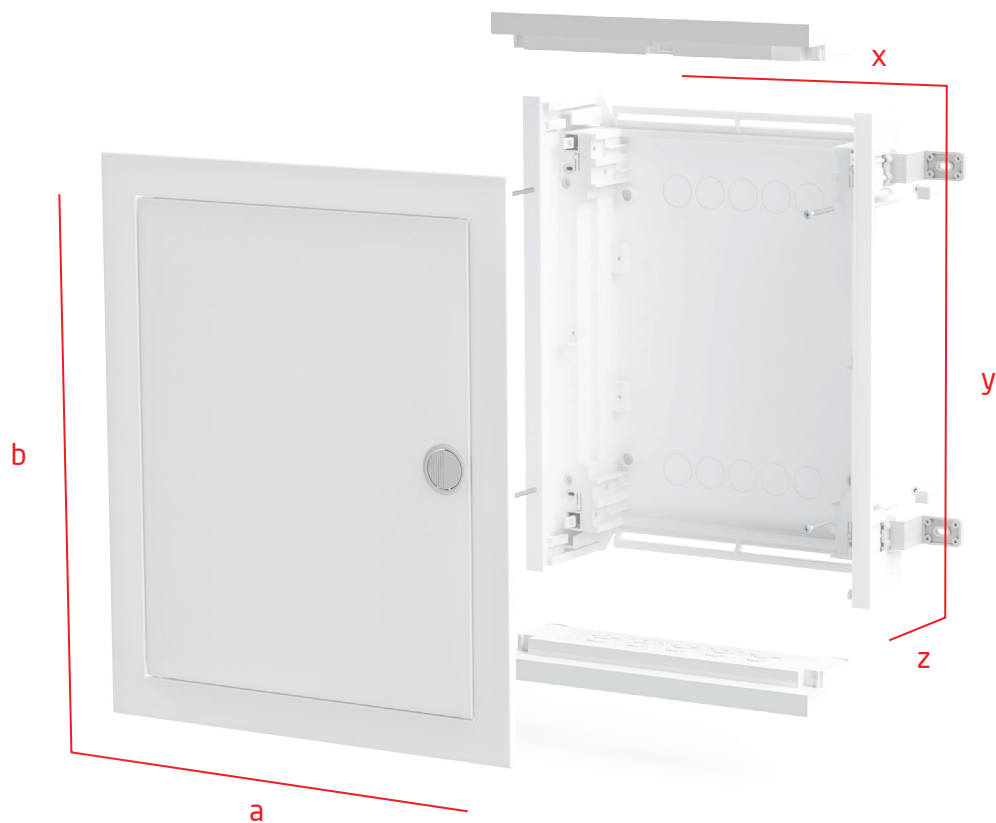

	RE20 RE20VO	RE21 RE21PV RE21VO RE21PVVO	RE22 RE22PV RE22VO RE22PVVO	RE23 RE23PV RE23VO RE23PVVO	RE24 RE24PV RE24VO RE24PVVO
vanjske dimenzije proizvoda (abc*) / external product dimensions (abc*)	368 x 343 x 93	368 x 443 x 93	368 x 568 x 93	368 x 753 x 93	368 x 878 x 93
dimenzije otvora za ugradnju (xyz) / installation hole dimensions (xyz)	314 x 314 x 86,5	314 x 414 x 86,5	314 x 539 x 86,5	314 x 724 x 86,5	314 x 849 x 86,5

* c - dubina / depth

1.5.

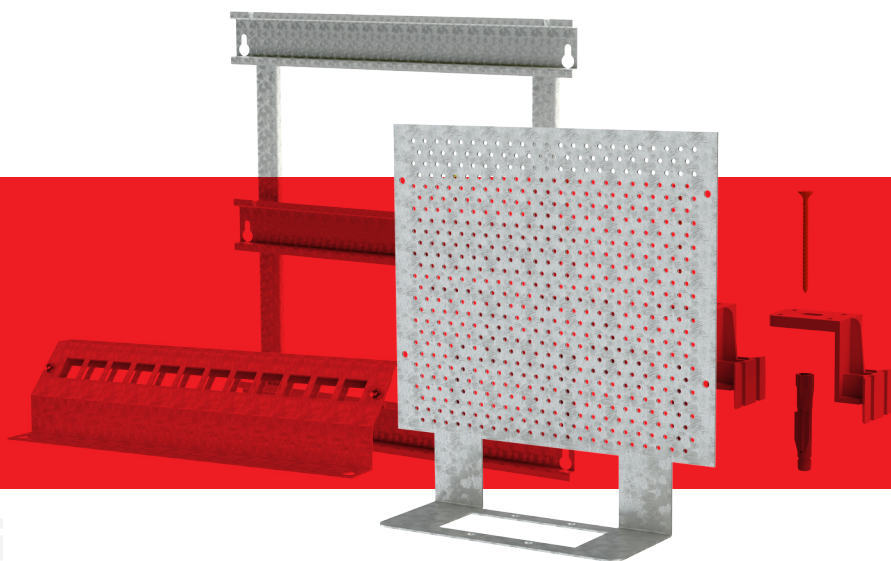

mandeks

MARO | METALIS

Pribor

Acessories

1.5. Pribor Accessories



RB10

ADAPTER ZA DIN TRAČNICU
35mm 1M

ADAPTER FOR DIN RAIL
35MM 1M



RB11

ADAPTER ZA DIN TRAČNICU
35mm 2M

ADAPTER FOR DIN RAIL
35MM 2M



RB12

NOSAČ SA SABIRNICOM
N+PE (2X25mm² +
14x16mm²)

TERMINAL STRIP N+PE
(2x25mm²+14x16mm²)



RB13

BRAVICA SA KLJUČEM ZA
METALIS I TOWER
RAZVODNE ORMARE


LOCK WITH KEY FOR
METALIS AND TOWER
DISTRIBUTION BOX



RB13BK

BRAVICA METALIS
RAZVODNOG ORMARA


LOCK FOR METALIS
DISTRIBUTION BOX



RB14

SET NOSAČA ORMARA
ZA MONTAŽU U ŠUPLJE
STIJENKE

HOLLOW WALL MOUNTING
DISTRIBUTION BOX
CARRIER SET



RB15

SET NOSAČA ORMARA ZA
MONTAŽU U ZID

BRICK WALL MOUNTING
DISTRIBUTION BOX
CARRIER SET



RB16

POPUNA PREDNJE STRANE
ORMARA 9 DIN

BLIND ELEMENT FOR
DISTRIBUTION BOX 9 DIN



RB17

NOSAČ SA SABIRNICOM N
(7x16mm²)


TERMINAL STRIP N
(7x16mm²)



RB18

PATCH PANEL 12 M
POD KUTOM 45° INOX,
KEystone STANDARD
PRIČVRŠČIVANJA

PATCH PANEL 12 M 45°
ANGLE INOX, KEystone
FIXING STANDARD



RB18EC

PATCH PANEL 12 M POD
KUTOM 45° ECONOMIC,
KEystone STANDARD
PRIČVRŠČIVANJA


PATCH PANEL 12 M
45° ANGLE ECONOMIC,
KEystone FIXING
STANDARD



RB19

PATCH PANEL 12 M
POD KUTOM 90° INOX,
KEystone STANDARD
PRIČVRŠČIVANJA

PATCH PANEL 12 M 90°
ANGLE INOX, KEystone
FIXING STANDARD



RB19EC

PATCH PANEL 12 M POD
KUTOM 90° ECONOMIC,
KEystone STANDARD
PRIČVRŠČIVANJA

PATCH PANEL 12 M
90° ANGLE ECONOMIC,
KEystone FIXING
STANDARD

RB18EC-2

BEZ NOSAČA MODULA

WITHOUT BOTTOM
MOUNTING PLATE


RB19EC-2

BEZ NOSAČA MODULA


WITHOUT BOTTOM
MOUNTING PLATE

**RE10**

NOSAČ OSIGURAČA
METALIS I FINE ORMARA
12+2 DIN
*12+2 DIN RAIL FOR CIRCUIT
BREAKERS*

**RE15**

DVOSTRUKI NOSAČ
OSIGURAČA 2X 12+2 DIN
*DOUBLE 2X 12+2 DIN RAIL
FOR CIRCUIT BREAKERS*

**RE16**

TROSTRUKI NOSAČ
OSIGURAČA 3X 12+2 DIN
*TRIPLE 3X 12+2 DIN RAIL
FOR CIRCUIT BREAKERS*

**RE17**


ČETVEROSTRUKI NOSAČ
OSIGURAČA 4X 12+2 DIN
*QUADRUPLE 4X 12+2
DIN RAIL FOR CIRCUIT
BREAKERS*

**RE18**


PETEROSTRUKI NOSAČ
OSIGURAČA 5X 12+2 DIN
*QUINTUPLE 5X 12+2
DIN RAIL FOR CIRCUIT
BREAKERS*

**RE11**


NOSAČ MODEMA
MODEM CARRIER

**RE12**

MREŽASTA MONTAŽNA
PLOČA METALIS ORMARA
ZA MULTIMEDIJU 2X
*MOUNTING PLATE FOR
DISTRIBUTION BOX FOR
MULTIMEDIA 2X*

**RE13**

MREŽASTA MONTAŽNA
PLOČA METALIS ORMARA
ZA MULTIMEDIJU 3X
*MOUNTING PLATE FOR
DISTRIBUTION BOX FOR
MULTIMEDIA 3X*

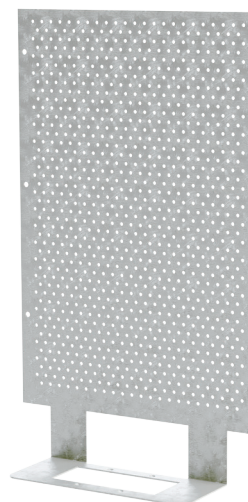**RE14**

MREŽASTA MONTAŽNA
PLOČA METALIS ORMARA
ZA MULTIMEDIJU 4X
*MOUNTING PLATE FOR
DISTRIBUTION BOX FOR
MULTIMEDIA 4X*

**AC41PW**

KUĆIŠTE NO CUBO IP20
4M PW S DNOM
*BOX NO CUBO WITH BACK
SIDE COVER IP20 4M*

2.1.

mandeks



MARO | FINE

Podžbukni razvodni ormari s bijelim
i prozirnim plastičnim vratima

*In wall distribution boxes with white
and transparent plastic doors*

2.1. Podžbukni razvodni ormari s bijelim i prozirnim plastičnim vratima

In wall distribution boxes with white and transparent plastic doors

- plastična vrata i okvir
- bijela boja vrata RAL 9003 ili prozirna vrata
- područje ugradnje: podžbukna ugradnja u zid od opeke
- sukladno normi EN 60670-1 i IEC 60670-24
- nazivna struja: za uređaje do 63A
- 400V~, razred II
- IP30 bez vrata
- IP40 sa vratima

PRILOŽENA OPREMA

- nosači osigurača
- izolirani konektori za vod za uzemljenje/neutralni vod, zadovoljavaju test užarenom niti na 960 °C
- pribor za instalaciju u zid od opeke/šuplje stjenke
- slijepi poklopci

MOGUĆNOSTI

- ugradnja libele, ugradnja Modul programa, korištenjem adaptera RB10 i RB11, izmjena smjera otvaranja vrata na lijevo ili desno, bez demontaže okvira

- plastic door and frame
- white color RAL 9003 or transparent door
- područje ugradnje: podžbukna ugradnja u zid od opeke in accordance with EN 60670-1 i IEC 60670-24
- rated current: up to 63A
- 400V~, class II
- IP30 without door
- IP40 with door

ACCESSORIES

- DIN rail for circuit breakers
- insulated connectors for earthing/neutral, suitable to glow wire test of 960 °C
- brick/hollow wall mounting distribution box carrier set
- blank

POSSIBILITIES

- installation of level, installation of Modul program by using adapters RB10 and RB11, change of direction of opening door to left or right side, without dismantling the frame



RB20PW

RB20PD

RAZVODNI ORMAR FINE 12+2 DIN
JEDNOREDNI P/Ž

BIJELA VRATA

PROZIRNA VRATA

Izolirani konektori za vod za
uzemljenje i neutralni vod N + PE:
2x(2x25mm² + 8x16mm²)

DISTRIBUTION BOX FINE 12+2
DIN ONE ROW IN-WALL

WHITE DOOR

TRANSPARENT DOOR

Terminal strip N + PE:
2x(2x25mm² + 8x16mm²)



RB21PW

RB21PD

RAZVODNI ORMAR FINE 24+4 DIN
DVOREDNI P/Ž

BIJELA VRATA

PROZIRNA VRATA

Izolirani konektori za vod za
uzemljenje i neutralni vod N + PE:
2x(2x25mm² + 14x16mm²)

DISTRIBUTION BOX FINE 24+4
DIN TWO ROWS IN-WALL

WHITE DOOR

TRANSPARENT DOOR

Terminal strip N + PE:
2x(2x25mm² + 14x16mm²)

**RB22PW**

RAZVODNI ORMAR FINE 36+6
DIN TROREDNI P/Ž

DISTRIBUTION BOX FINE 36+6
DIN THREE ROWS IN-WALL

BIJELA VRATA

WHITE DOOR

RB22PD

PROZIRNA VRATA

TRANSPARENT DOOR

Izolirani konektori za vod za
uzemljenje i neutralni vod N + PE:
2x(2x25mm² + 14x16mm²)

Terminal strip N + PE:
2x(2x25mm² + 14x16mm²)



	RB20PW RB20PD	RB21PW RB21PD	RB22PW RB22PD
vanjske dimenzije proizvoda (abc*) / external product dimensions (abc*)	368 x 343 x 101	368 x 443 x 101	368 x 568 x 101
dimenzije otvora za ugradnju (xyz) / installation hole dimensions (xyz)	314 x 314 x 86,5	314 x 414 x 86,5	314 x 539 x 86,5

* c - dubina / depth

2.2.



MARO | FINE

Podžbukni razvodni ormari
s dekorativnim plastičnim vratima

*In wall distribution boxes
with decorative plastic doors*

2.2. Podžbukni razvodni ormari s dekorativnim plastičnim vratima

In wall distribution boxes with decorative plastic doors



SIVA BOJA VRATA RAL 9006
ELLOX SILVER DOOR RAL 9006

RB20ES

RAZVODNI ORMAR FINE ES 12+2 DIN JEDNOREDNI P/Ž
DISTRIBUTION BOX FINE ES 12+2 DIN ONE ROW IN-WALL

Izolirani konektori N + PE: 2x(2x25mm² + 8x16mm²)
Terminal strip N + PE: 2x(2x25mm² + 8x16mm²)

RB21ES

RAZVODNI ORMAR FINE ES 24+4 DIN DVOREDNI P/Ž
DISTRIBUTION BOX FINE ES 24+4 DIN TWO ROWS IN-WALL

Izolirani konektori N + PE: 2x(2x25mm² + 14x16mm²)
Terminal strip N + PE: 2x(2x25mm² + 14x16mm²)

RB22ES

RAZVODNI ORMAR FINE ES 36+6 DIN TROREDNI P/Ž
DISTRIBUTION BOX FINE ES 36+6 DIN THREE ROWS IN-WALL

Izolirani konektori N + PE: 2x(2x25mm² + 14x16mm²)
Terminal strip N + PE: 2x(2x25mm² + 14x16mm²)



ZLATNA BOJA VRATA PANTONE PQ-10364C
SAND GOLD DOOR PANTONE PQ-10364C

RB20SG

RAZVODNI ORMAR FINE SG 12+2 DIN JEDNOREDNI P/Ž
DISTRIBUTION BOX FINE SG 12+2 DIN ONE ROW IN-WALL

Izolirani konektori N + PE: 2x(2x25mm² + 8x16mm²)
Terminal strip N + PE: 2x(2x25mm² + 8x16mm²)

RB21SG

RAZVODNI ORMAR FINE SG 24+4 DIN DVOREDNI P/Ž
DISTRIBUTION BOX FINE SG 24+4 DIN TWO ROWS IN-WALL

Izolirani konektori N + PE: 2x(2x25mm² + 14x16mm²)
Terminal strip N + PE: 2x(2x25mm² + 14x16mm²)

RB22SG

RAZVODNI ORMAR FINE SG 36+6 DIN TROREDNI P/Ž
DISTRIBUTION BOX FINE SG 36+6 DIN THREE ROWS IN-WALL

Izolirani konektori N + PE: 2x(2x25mm² + 14x16mm²)
Terminal strip N + PE: 2x(2x25mm² + 14x16mm²)



CRNA BOJA VRATA RAL 7022
NIGHT BLACK DOOR RAL 7022

RB20NB

RAZVODNI ORMAR FINE NB 12+2 DIN JEDNOREDNI P/Ž
DISTRIBUTION BOX FINE NB 12+2 DIN ONE ROW IN-WALL

Izolirani konektori N + PE: 2x(2x25mm² + 8x16mm²)
Terminal strip N + PE: 2x(2x25mm² + 8x16mm²)

RB21NB

RAZVODNI ORMAR FINE NB 24+4 DIN DVOREDNI P/Ž
DISTRIBUTION BOX FINE NB 24+4 DIN TWO ROWS IN-WALL

Izolirani konektori N + PE: 2x(2x25mm² + 14x16mm²)
Terminal strip N + PE: 2x(2x25mm² + 14x16mm²)

RB22NB

RAZVODNI ORMAR MARO NB 36+6 DIN TROREDNI P/Ž
DISTRIBUTION BOX FINE NB 36+6 DIN THREE ROWS IN-WALL

Izolirani konektori N + PE: 2x(2x25mm² + 14x16mm²)
Terminal strip N + PE: 2x(2x25mm² + 14x16mm²)



VRATA U IMITACIJI SMREKE
SPRUCE IMITATION DOOR

RB20WP

RAZVODNI ORMAR FINE WP 12+2 DIN JEDNOREDNI P/Ž
DISTRIBUTION BOX FINE WP 12+2 DIN ONE ROW IN-WALL

Izolirani konektori N + PE: $2 \times (2 \times 25 \text{ mm}^2 + 8 \times 16 \text{ mm}^2)$
Terminal strip N + PE: $2 \times (2 \times 25 \text{ mm}^2 + 8 \times 16 \text{ mm}^2)$

RB21WP


RAZVODNI ORMAR FINE WP 24+4 DIN DVOREDNI P/Ž
DISTRIBUTION BOX FINE WP 24+4 DIN TWO ROWS IN-WALL

Izolirani konektori N + PE: $2 \times (2 \times 25 \text{ mm}^2 + 14 \times 16 \text{ mm}^2)$
Terminal strip N + PE: $2 \times (2 \times 25 \text{ mm}^2 + 14 \times 16 \text{ mm}^2)$

RB22WP

RAZVODNI ORMAR FINE WP 36+6 DIN TROREDNI P/Ž
DISTRIBUTION BOX FINE WP 36+6 DIN THREE ROWS IN-WALL

Izolirani konektori N + PE: $2 \times (2 \times 25 \text{ mm}^2 + 14 \times 16 \text{ mm}^2)$
Terminal strip N + PE: $2 \times (2 \times 25 \text{ mm}^2 + 14 \times 16 \text{ mm}^2)$

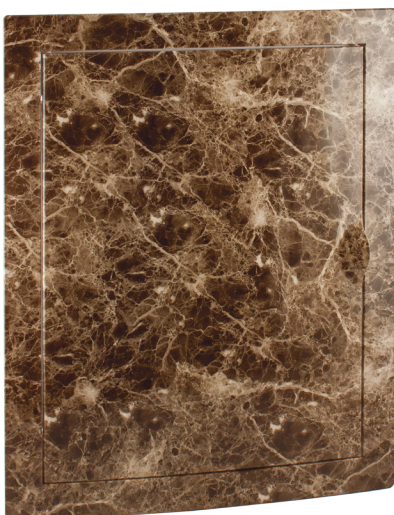

VRATA U IMITACIJI SMARAGDNOG KAMENA
STONE EMERALD DOOR

RB20SE

RAZVODNI ORMAR FINE SE 12+2 DIN JEDNOREDNI P/Ž
DISTRIBUTION BOX FINE SE 12+2 DIN ONE ROW IN-WALL

Izolirani konektori N + PE: $2 \times (2 \times 25 \text{ mm}^2 + 8 \times 16 \text{ mm}^2)$
Terminal strip N + PE: $2 \times (2 \times 25 \text{ mm}^2 + 8 \times 16 \text{ mm}^2)$

RB21SE

RAZVODNI ORMAR FINE SE 24+4 DIN DVOREDNI P/Ž
DISTRIBUTION BOX FINE SE 24+4 DIN TWO ROWS IN-WALL

Izolirani konektori N + PE: $2 \times (2 \times 25 \text{ mm}^2 + 14 \times 16 \text{ mm}^2)$
Terminal strip N + PE: $2 \times (2 \times 25 \text{ mm}^2 + 14 \times 16 \text{ mm}^2)$

RB22SE

RAZVODNI ORMAR FINE SE 36+6 DIN TROREDNI P/Ž
DISTRIBUTION BOX FINE SE 36+6 DIN THREE ROWS IN-WALL

Izolirani konektori N + PE: $2 \times (2 \times 25 \text{ mm}^2 + 14 \times 16 \text{ mm}^2)$
Terminal strip N + PE: $2 \times (2 \times 25 \text{ mm}^2 + 14 \times 16 \text{ mm}^2)$



VRATA U IMITACIJI BIJELOG KAMENA
STONE WHITE DOOR

RB20SW

RAZVODNI ORMAR FINE SW 12+2 DIN JEDNOREDNI P/Ž
DISTRIBUTION BOX FINE SW 12+2 DIN ONE ROW IN-WALL

Izolirani konektori N + PE: $2 \times (2 \times 25 \text{ mm}^2 + 8 \times 16 \text{ mm}^2)$
Terminal strip N + PE: $2 \times (2 \times 25 \text{ mm}^2 + 8 \times 16 \text{ mm}^2)$

RB21SW

RAZVODNI ORMAR FINE SW 24+4 DIN DVOREDNI P/Ž
DISTRIBUTION BOX FINE SW 24+4 DIN TWO ROWS IN-WALL

Izolirani konektori N + PE: $2 \times (2 \times 25 \text{ mm}^2 + 14 \times 16 \text{ mm}^2)$
Terminal strip N + PE: $2 \times (2 \times 25 \text{ mm}^2 + 14 \times 16 \text{ mm}^2)$


RB22SW

RAZVODNI ORMAR FINE SW 36+6 DIN TROREDNI P/Ž
DISTRIBUTION BOX FINE SW 36+6 DIN THREE ROWS IN-WALL

Izolirani konektori N + PE: $2 \times (2 \times 25 \text{ mm}^2 + 14 \times 16 \text{ mm}^2)$
Terminal strip N + PE: $2 \times (2 \times 25 \text{ mm}^2 + 14 \times 16 \text{ mm}^2)$

3.1.

mandeks

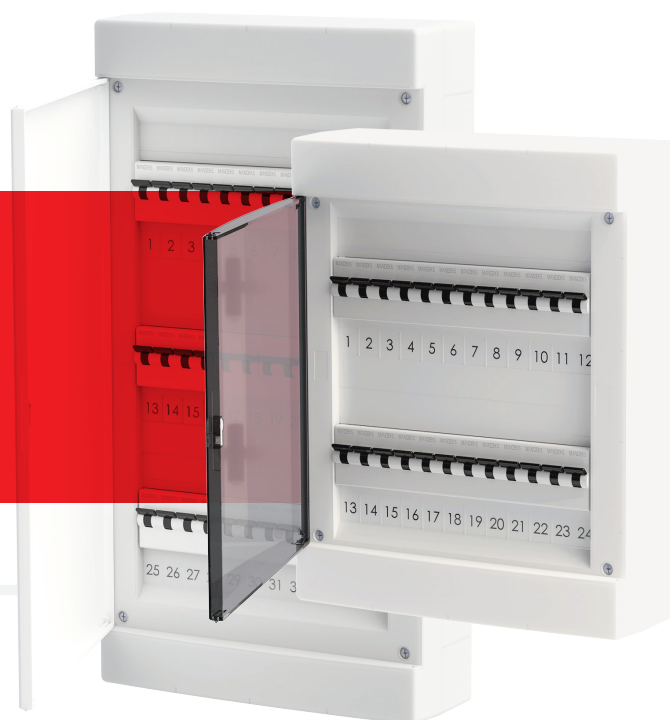

MARO | TOWER

Nadžbukni razvodni ormari s plastičnim vratima

On wall plastic distribution boxes with plastic doors

3.1. Nadžbukni razvodni ormari s plastičnim vratima

On wall plastic distribution boxes with plastic doors

- plastična vrata i kućište ormara
- područje ugradnje: nadžbukna ugradnja
- bijela ili prozirna/zadimljena plastična vrata
- sukladno normi EN 60670-1 i IEC 60670-24
- nazivna struja: za uređaje do 63A
- 400V~, razred II
- IP30 bez vrata
- IP40 sa vratima

PRILožENA OPREMA

- nosači osigurača
- izolirani konektori za vod za uzemljenje/neutralni vod, zadovoljavaju test užarenom niti na 960 °C
- slijepi poklopci
- poklopci za zaštitu od prašine

MOGUĆNOSTI

- ugradnja libele, ugradnja bravice sa ključem, ugradnja Modul opreme, korištenjem adaptera RB10 i RB11, izmjena smjera otvaranja vrata na lijevo ili desno, bez demontaže okvira

- *plastic door and base*
- *installation: On wall*
- *white or transparent/smoky plastic door*
- *in accordance with EN 60670-1 i IEC 60670-24*
- *rated current: up to 63A*
- *400V~, class II*
- *IP30 without door*
- *P40 with door*

ACCESSORIES

- *DIN rail for circuit breakers*
- *insulated connectors for earthing/neutral, suitable to glow wire test of 960 °C*
- *blank*
- *dust protection*

POSSIBILITIES

- *installation of level, installation of lock with key, installation of Modul program by using adapters RB10 and RB11, change of direction of opening door to left or right side, without dismantling the frame*



RAZVODNI ORMAR TOWER 4
DIN JEDNOREDNI N/Ž


*DISTRIBUTION BOX TOWER 4
DIN ONE ROW ON-WALL*

M020PW

BIJELA VRATA
WHITE DOOR

M020PD

PROZIRNA VRATA
TRANSPARENT DOOR

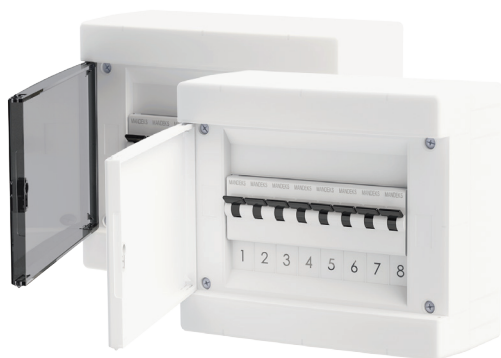

RAZVODNI ORMAR TOWER 8
DIN JEDNOREDNI N/Ž


*DISTRIBUTION BOX TOWER 8
DIN ONE ROW ON-WALL*

M021PW

BIJELA VRATA
WHITE DOOR

M021PD

PROZIRNA VRATA
TRANSPARENT DOOR

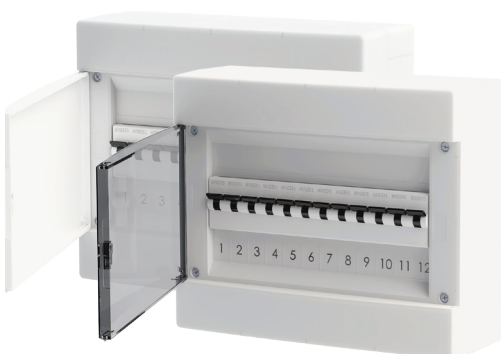

RAZVODNI ORMAR TOWER 12
DIN JEDNOREDNI N/Ž


*DISTRIBUTION BOX TOWER 12
DIN ONE ROW ON-WALL*

M022PW

BIJELA VRATA
WHITE DOOR

M022PD

PROZIRNA VRATA
TRANSPARENT DOOR

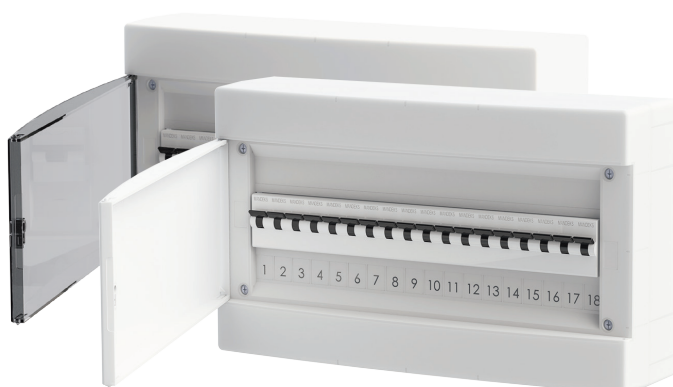**M023PW**


RAZVODNI ORMAR TOWER 18
DIN JEDNOREDNI N/Ž

*DISTRIBUTION BOX TOWER 18
DIN ONE ROW ON-WALL*

BIJELA VRATA
WHITE DOOR

M023PD

PROZIRNA VRATA
TRANSPARENT DOOR

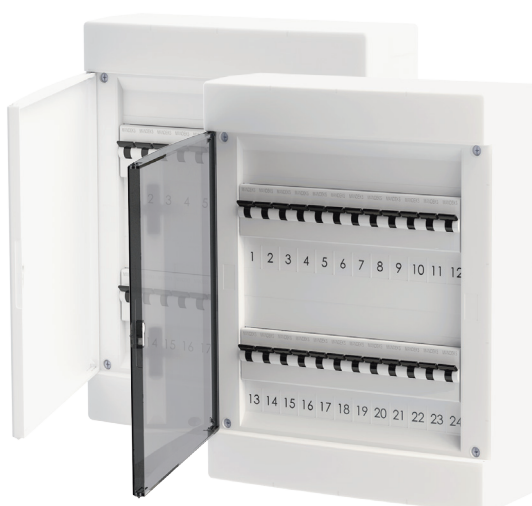**M024PW**

RAZVODNI ORMAR TOWER 24
DIN DVOREDNI N/Ž

*DISTRIBUTION BOX TOWER 24
DIN TWO ROWS ON-WALL*

BIJELA VRATA
WHITE DOOR

M024PD

PROZIRNA VRATA
TRANSPARENT DOOR

**M025PW**

RAZVODNI ORMAR TOWER 36
DIN TROREDNI N/Ž


*DISTRIBUTION BOX TOWER 36
DIN THREE ROWS ON-WALL*

BIJELA VRATA
WHITE DOOR

M025PD

PROZIRNA VRATA
TRANSPARENT DOOR

3.1.

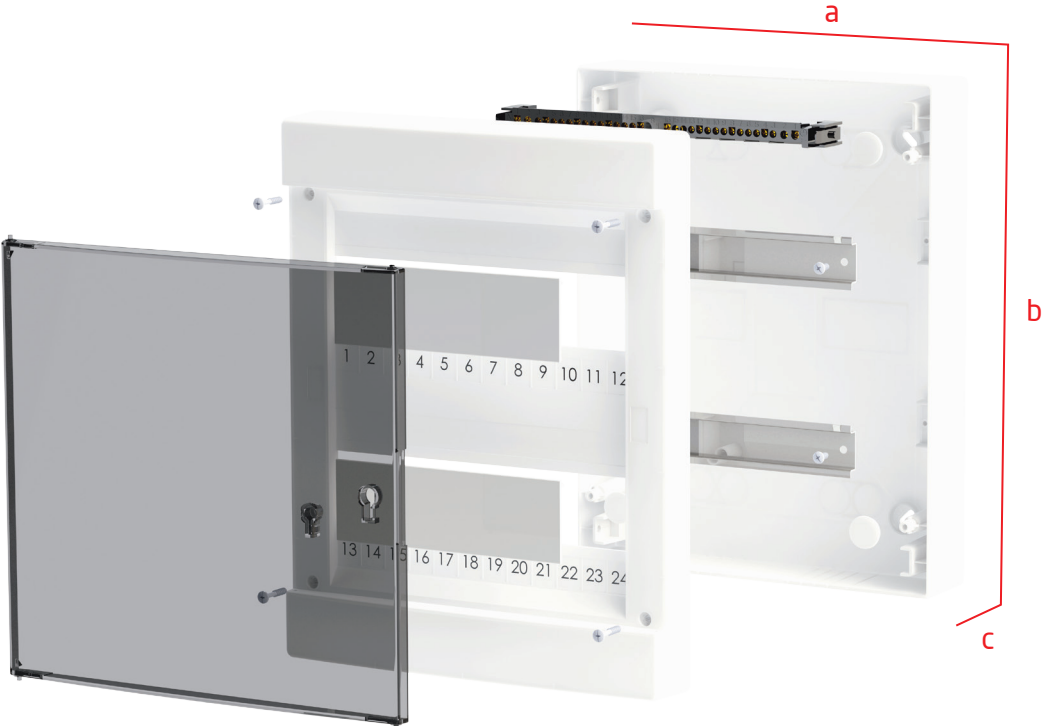

	M020PW M020PD	M021W M021PD	M022PW M022PD	M023PW M023PD	M024PW M024PD	M025PW M025PD
vanjske dimenzije proizvoda (abc) / external product dimensions (abc)	130 x 180 x 95	210 x 180 x 95	275 x 225 x 95	389 x 225 x 97	275 x 350 x 95	275 x 510 x 95

4.1.

mandeks



DOMINO

Nadžbukni vodotjesni ormari

On wall waterproof distribution boxes

4.1. Nažbukni vodotjesni ormari

On wall waterproof distribution boxes

- plastična vrata i kućište ormara
- područje ugradnje: nažbukna ugradnja
- prozirna/zadimljena plastična vrata
- sukladno normi EN 60670-1 i CEI 23-49
- nazivna struja: za uređaje do 63A
- 400V~
- IP66

PRILOŽENA OPREMA

- nosači osigurača
- baglame za tijelo i prednji dio ormara
- pribor za instalaciju na zid
- slijepi poklopci

MOGUĆNOSTI

- modularnost/ moguće kombiniranje ormara DOMINO međusobno, pomoću uvodnica, ugradnja bravice sa ključem ili trokutasti plastični ključ, ugradnja Modul opreme, korištenjem adaptera RB10 i RB11

- plastic door and base
- installation: on wall
- transparent/smoky plastic door
- in accordance: EN 60670 and CEI 23-49
- rated current: up to 63A
- 400V~
- IP66

ACCESSORIES

- DIN rail for circuit breakers
- hinge for body and front part of distribution box
- accessories for on wall installation
- blanks

POSSIBILITIES

- modularity - combining distribution box DOMINO mutually, installation of lock with key or triangular plastic key, installation of Modul program, by using adapters RB10 and RB11



672.2002

RAZVODNI ORMAR DOMINO 2 DIN,
135x76x102 JEDNOREDNI N/Ž

*DISTRIBUTION BOX DOMINO 2 DIN,
135x76x102 ONE ROW ON-WALL*



672.2004

RAZVODNI ORMAR DOMINO 4 DIN,
190x112x106 JEDNOREDNI N/Ž

*DISTRIBUTION BOX DOMINO 4 DIN,
190x112x106 ONE ROW ON-WALL*



672.2008

RAZVODNI ORMAR DOMINO 8 DIN,
190x184x106 JEDNOREDNI N/Ž

*DISTRIBUTION BOX DOMINO 8 DIN,
190x184x106 ONE ROW ON-WALL*



672.2012

RAZVODNI ORMAR DOMINO 12 DIN,
250x256x140 JEDNOREDNI N/Ž

*DISTRIBUTION BOX DOMINO 12 DIN,
250x256x140 ONE ROW ON-WALL*

**672.2016**

RAZVODNI ORMAR DOMINO 16 DIN,
250x328x140 JEDNOREDNI N/Ž

*DISTRIBUTION BOX DOMINO 16 DIN,
250x328x140 ONE ROW ON-WALL*

**672.4024**

RAZVODNI ORMAR DOMINO 24 DIN,
400x256x140 DVOREDNI N/Ž

*DISTRIBUTION BOX DOMINO 24 DIN,
400x256x140 ONE TWO ROWS ON-WALL*

**672.4032**

RAZVODNI ORMAR DOMINO 32 DIN,
400x328x140 DVOREDNI N/Ž

*DISTRIBUTION BOX DOMINO 32 DIN,
400x328x140 TWO ROWS ON-WALL*

**672.5048**

RAZVODNI ORMAR DOMINO 48 DIN,
550x328x140 TROREDNI N/Ž

*DISTRIBUTION BOX DOMINO 48 DIN,
550x328x140 THREE ROWS ON-WALL*


4.1.




672.7064

RAZVODNI ORMAR DOMINO 64 DIN,
700x328x140 ČETVEROREDNI N/Ž
DISTRIBUTION BOX DOMINO 64 DIN,
700x328x140 FOUR ROWS ON-WALL


M190




M250

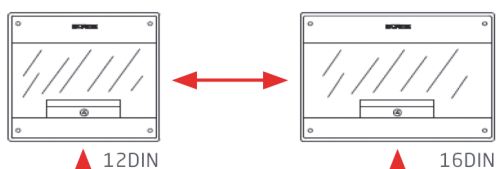

M400

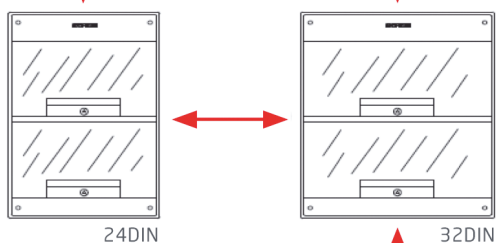

M500



4.2.



DOMINO

Pribor

Acessories

4.2. Pribor Accessories



654.0365

NOSAČ SA SABIRNICOM DOMINO ORMARA 4 DIN

TERMINAL STRIP FOR DOMINO DISTRIBUTION BOX 4 DIN



654.0363

NOSAČ SA SABIRNICOM (5x16mm + 5x10mm)
DOMINO ORMARA 8 DIN

*TERMINAL STRIP (5x16mm + 5x10mm) FOR DOMINO
DISTRIBUTION BOX 8 DIN*



654.0361

NOSAČ SA SABIRNICOM (5x16mm + 5x10mm) DOMINO
ORMARA 12/24 DIN

*TERMINAL STRIP (5x16mm + 5x10mm) FOR DOMINO
DISTRIBUTION BOX 12/24 DIN*



654.0362

NOSAČ SA SABIRNICOM (5x16mm + 5x10mm) DOMINO
ORMARA 16/32/48 DIN

*TERMINAL STRIP (5x16mm + 5x10mm) FOR DOMINO
DISTRIBUTION BOX 16/32/48 DIN*



654.0360

DODATNA SABIRNICA (5x16mm + 5x10mm) ZA
654.0361/654.0362

*ADDITIONAL TERMINAL STRIP (5x16mm + 5x10mm)
FOR 654.0361/654.0362*



654.0020

ZIDNI NOSAČ DOMINO ORMARA

WALL CARRIER SET DOMINO



654.0030

OPREMA ZA PEČAČENJE

COVER SEALING KIT



654.0070

BRAVICA S KLJUČEM DOMINO ORMARA

LOCK WITH KEY KIT DOMINO



TEM Mandeks d.o.o.
Varaždinska 2, 88220
Široki Brijeg, Bosna i Hercegovina
Tel: +387 39 704 414
Faks: +387 39 706 763
E-mail: info@mandeks.ba
Web: www.mandeks.ba